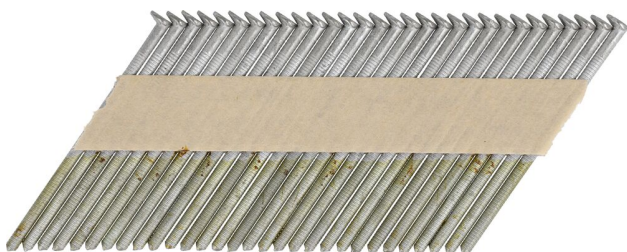


SPL-G656EUBXR**APPLICATIONS**

Framing, pallets and crates, subfloor,
wood-to-wood applications

TECHNICAL SPECIFICATIONS

Collation angle	34 °
Collation type	Paper collated
Wire material	Stainless steel AISI 316 (A4)
Coating	Sencoted
Head diameter	6.5 mm
Nail shank type	Ring shank
Point type	Sharp chisel
Pointangle	40 °
Nail length	70 mm
Nail diameter	2.8 mm

LOGISTICAL SPECIFICATIONS

GTIN	8715274139661
Package quantity	600 pieces

CE SPECIFICATIONS

CE fastener type	Round cross-section ring shank nail
Service class	3
Coating type	Coating type 3
Head cross sectional area	30 mm
Characteristic yield moment	3906 Nmm
Characteristic head pull through parameter	33.5 N/mm ²
Characteristic tensile capacity	4.62 N
Characteristic tensile strength	695 N/mm ²