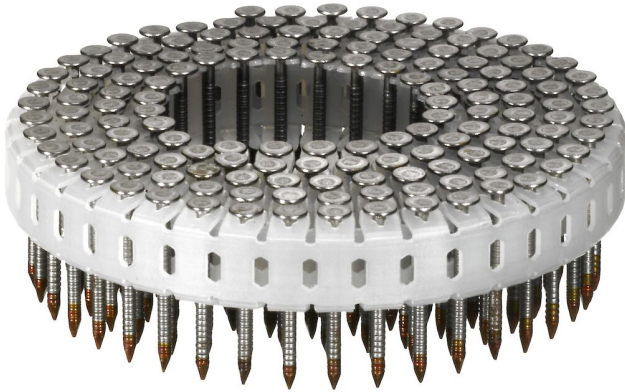


DL15AABBS**APPLICATIONS**


Framing, subfloor, trusses, pallets and crates

TECHNICAL SPECIFICATIONS

Collation angle	0 °
Wounding type	Flat
Collation type	Plastic collated 9mm
Wire material	Carbon steel standard tensile
Finish	Regular galvanised
Coating	Sencoted
Nail head type	Full round head
Nail shank type	Ring shank
Point type	Diamond
Pointangle	36 °
Nail length	32 mm
Nail diameter	1.8 mm

LOGISTICAL SPECIFICATIONS

GTIN	8715274031415
Package quantity	11600 pieces
Net weight	10 kg

FASTENER SPECIFICATIONS**CE SPECIFICATIONS**

CE fastener type	Round cross-section ring shank nail
Protection level in micron	≤5
Service class	1
Coating type	Coating type 3
Head cross sectional area	19 mm
Threaded/profiled length	20 mm
Characteristic yield moment	1062 Nmm
Characteristic head pull through parameter	25.12 N/mm ²
Characteristic tensile strength	777 N/mm ²