




MAKE IT LAST.

# SENCOPLUS G6 OFFSET RING STRIPNAIL 2,8X70MM STAINLESS STEEL AISI 316 (A4)

## SPL-G656EUBXR

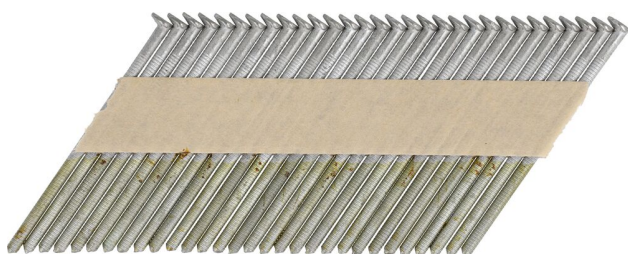

### APPLICATIONS

Framing, pallets and crates, subfloor,  
wood-to-wood applications

### TECHNICAL SPECIFICATIONS

|                 |                               |
|-----------------|-------------------------------|
| Collation angle | 34 °                          |
| Collation type  | Paper collated                |
| Wire material   | Stainless steel AISI 316 (A4) |
| Coating         | Sencoted                      |
| Head diameter   | 6.5 mm                        |
| Nail shank type | Ring shank                    |
| Point type      | Sharp chisel                  |
| Pointangle      | 40 °                          |
| Nail length     | 70 mm                         |
| Nail diameter   | 2.8 mm                        |

### LOGISTICAL SPECIFICATIONS

|                  |               |
|------------------|---------------|
| GTIN             | 8715274139661 |
| Package quantity | 600 pieces    |

### CE SPECIFICATIONS

|                                            |                                     |
|--------------------------------------------|-------------------------------------|
| CE fastener type                           | Round cross-section ring shank nail |
| Coating type                               | Coating type 3                      |
| Coating length                             | 43 mm                               |
| Head cross sectional area                  | 30 mm                               |
| Characteristic yield moment                | 3906 Nmm                            |
| Characteristic head pull through parameter | 33.5 N/mm <sup>2</sup>              |
| Characteristic tensile capacity            | 4.62 N                              |
| Characteristic tensile strength            | 695 N/mm <sup>2</sup>               |