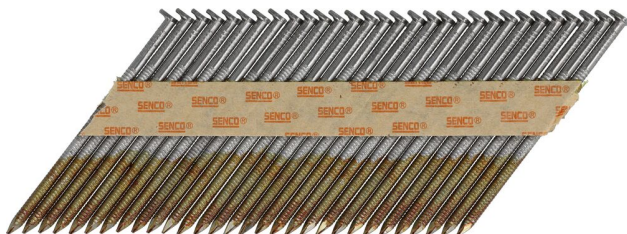


GE51APBKR**APPLICATIONS**

Framing, pallets and crates, subfloor, trusses

TECHNICAL SPECIFICATIONS

| | |
|-----------------|-------------------------------|
| Collation angle | 34 ° |
| Collation type | Paper collated |
| Wire material | Carbon steel standard tensile |
| Finish | Bright basic standard tensile |
| Coating | Sencoted |
| Nail head type | Clipped head |
| Head width | 6.81 - 7.21 mm |
| Head length | 4.85 - 5.2 mm |
| Nail shank type | Ring shank |
| Point type | Diamond |
| Pointangle | 40 ° |
| Nail length | 50 mm |
| Nail diameter | 2.87 mm |

LOGISTICAL SPECIFICATIONS

| | |
|------------------|---------------|
| GTIN | 8715274028583 |
| Package quantity | 2000 pieces |
| Net weight | 5.36 kg |

FASTENER SPECIFICATIONS**CE SPECIFICATIONS**

| | |
|--|-------------------------------------|
| CE fastener type | Round cross-section ring shank nail |
| Service class | 1 |
| Coating type | Coating type 3 |
| Coating length | 28 mm |
| Head cross sectional area | 30 mm |
| Threaded/profiled length | 30 mm |
| Characteristic yield moment | 2525 Nmm |
| Characteristic head pull through parameter | 20.3 N/mm ² |
| Characteristic tensile strength | 695 N/mm ² |