


GC SMOOTH STRIPNAIL 2,87X70MM CARBON STEEL STANDARD TENSILE

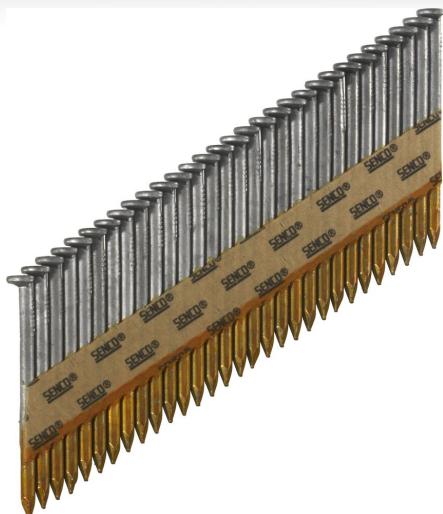

GC57ASBKR

APPLICATIONS

Framing, sheathing, subfloor, decking, trusses, pallets and crates


TECHNICAL SPECIFICATIONS

Collation angle	34 °
Collation type	Paper collated
Wire material	Carbon steel standard tensile
Finish	Hot-Dipped galvanised 3
Coating	Sencoted
Nail head type	Clipped head
Head width	6.81 - 7.21 mm
Head length	4.85 - 5.2 mm
Nail shank type	Smooth shank
Point type	Diamond
Pointangle	40 °
Nail length	75 mm
Nail diameter	2.87 mm

LOGISTICAL SPECIFICATIONS

GTIN	8715274026886
Package quantity	2000 pieces
Net weight	8.12 kg

FASTENER SPECIFICATIONS



CE SPECIFICATIONS

Dit veld moet nog verwijderd worden EN 14592:2008+A1:2012

CE fastener type Round cross-section plain shank nail

Protection level in micron 55

Service class 3

Coating type Coating type 3

Coating length 48 mm

Head cross sectional area 30 mm

Characteristic yield moment 3054 Nmm

Dit veld moet nog verwijderd worden 2.45 N/mm²

Characteristic head pull through parameter 27.12 N/mm²

Characteristic tensile strength 695 N/mm²