


FLOORING WOOD TO WOOD SCREW 4,2X35MM STAINLESS STEEL AISI 304 (A2)

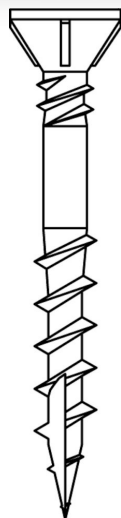

42RH35MS

APPLICATIONS

Wood-to-wood applications, subfloor

TECHNICAL SPECIFICATIONS

Collation type	Plastic collated
Screw head type	Small with 4 nibs
Screw recess	Senco drive 25
Screw thread type	2/3 coarse
Rotations per minute	2300 RPM
Wire material	Stainless steel AISI 304 (A2)
Point type	Type 17 cut point
Pointangle	23 °
Screw length	34 - 36 mm
Screw diameter	4.1 - 4.35 mm

LOGISTICAL SPECIFICATIONS

GTIN	8715274026572
Package quantity	1000 pieces
Net weight	2.5 kg

FASTENER SPECIFICATIONS



34 - 36 mm

4.1 - 4.35 mm

CE SPECIFICATIONS

Dit veld moet nog verwijderd worden EN 14592:2008+A1:2012

Service class	3
Inner threaded diameter	3.15 mm
Threaded/profiled length	23.3 mm
Characteristic yield moment	2422 Nmm
Dit veld moet nog verwijderd worden	12.35 N/mm ²
Characteristic head pull through parameter	16 N/mm ²
Characteristic tensile strength	2505 N/mm ²
Torsional ratio	≥ 1,5
Characteristic torsional resistance	1.88 Nm
Characteristic torsional strength	3.47 Nm