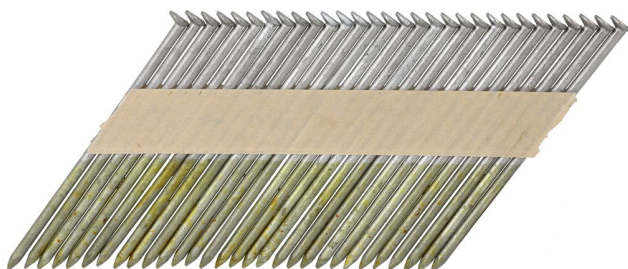


**SPL-H559AUBXR****APPLICATIONS**

Framing, pallets and crates, subfloor,  
wood-to-wood applications

**TECHNICAL SPECIFICATIONS**

Collation angle	34 °
Collation type	Paper collated
Wire material	Stainless steel AISI 316 (A4)
Coating	Sencoted
Head diameter	6.8 mm
Nail shank type	Smooth shank
Point type	Diamond
Pointangle	40 °
Nail length	90 mm
Nail diameter	3.1 mm

**LOGISTICAL SPECIFICATIONS**

GTIN	8715274140094
Package quantity	600 pieces

**CE SPECIFICATIONS**

CE fastener type	Round cross-section plain shank nail
Protection level in micron	55
Service class	3
Coating type	Coating type 3
Characteristic yield moment	5270 Nmm
Characteristic head pull through parameter	33.88 N/mm <sup>2</sup>
Characteristic tensile capacity	5.03 N