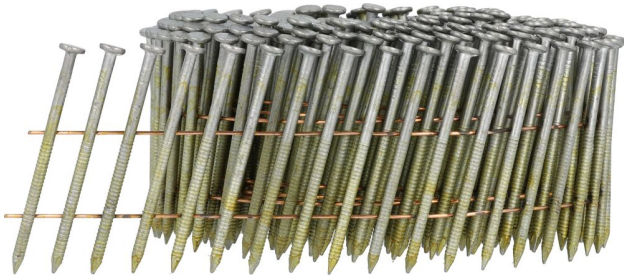


**EL17ASBHR****APPLICATIONS**


Sheathing, subfloor, particle boards

**TECHNICAL SPECIFICATIONS**

Collation angle	16 °
Wounding type	Flat
Collation type	Wire collated
Wire material	Carbon steel standard tensile
Finish	Hot-Dipped galvanised 3
Coating	Sencoted
Nail head type	Full round head
Nail shank type	Ring shank
Point type	Diamond
Pointangle	36 °
First welding wire distance	18.5 - 19.5 mm
Second welding wire distance	37 - 38 mm
Nail length	38 mm
Nail diameter	2.3 mm

**LOGISTICAL SPECIFICATIONS**

GTIN	8715274028910
Package quantity	2400 pieces
Net weight	3.55 kg

**FASTENER SPECIFICATIONS****CE SPECIFICATIONS**

CE fastener type	Round cross-section ring shank nail
Protection level in micron	55
Service class	3
Coating type	Coating type 3
Coating length	25.5 mm
Head cross sectional area	23 mm
Threaded/profiled length	19 mm
Characteristic yield moment	1523 Nmm
Characteristic head pull through parameter	22.4 N/mm <sup>2</sup>
Characteristic tensile strength	620 N/mm <sup>2</sup>